


Derivación 45° hem./hem. reducida

Derivación 45° hem./hem. reducida
Derivación 45° hembra/hembra, reducida al centro, con junta labiada.

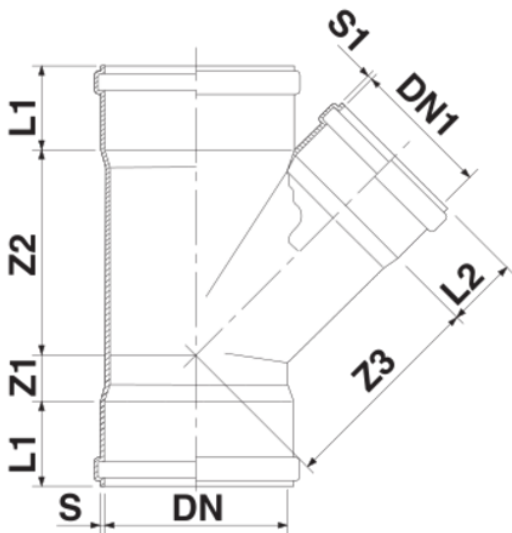

Referencia	Características	Unidades por caja	Medida	DN	DN 1	L1	L2	S	s1	z1	z2	product.detail.attribute.z3
0311832	Gris	6	160-125	160	125	74	62	4.0	3.2	41	180	185
0312151	Teja	1	200-160	200	160	86	74	5.9	4.7	54	228	232
0313832	Gris	4	200-125	200	125	86	74	5.9	3.7	54	228	232
1443451	Teja	1	315-110	315	110	117	55	7.7	3.2	7	287	315
1443541	Teja	1	315-125	315	125	117	68	7.7	3.2	7	287	310
1444041	Teja	1	250-160	250	160	101	74	6.2	4.0	41	251	262
1444441	Teja	1	400-110	400	110	145	60	9.8	3.2	30	450	380
1444551	Teja	1	315-250	315	250	117	99	7.7	6.2	28	335	344
1445141	Gris	1	500-110	500	110	180	250	10.5	3.2	-185	360	420
1445241	Gris	1	500-125	500	125	165	170	10.5	3.2	-55	510	475
1445341	Gris	1	500-160	500	160	200	250	10.5	4.0	-65	450	680
1445442	Gris	1	500-200	500	200	200	250	10.5	4.9	87	400	575
1446641	Teja	1	400-160	400	160	145	90	9.8	3.2	30	450	410
1447741	Teja	1	400-200	400	200	145	100	9.8	3.2	30	450	430