


Tubería templada 5 m

Tubería templada 5 m
Tubería evacuación Ø40 - 315 mm conforme DIN EN 1519 para instalación en el interior de edificios. Ø110 - 315 mm para instalación subterránea conforme DIN EN 12666.
Longitud de tubería = 5 m



Referencia	Características	Unidades por caja	Medida	d1	e	Kg /m	αCm2
K100400	PEAD	1	40	40	3	0.36	9.1
K100500	PEAD	1	50	50	3	0.45	15.2
K100600	PEAD	1	63	63	3	0.58	25.5
K100700	PEAD	1	75	75	3	0.7	37.4
K100900	PEAD	1	90	90	3.5	0.98	54.1
K101100	PEAD	1	110	110	4.2	1.46	80.7
K101200	PEAD	1	125	125	4.8	1.88	104.2
K101600	PEAD	1	160	160	6.2	3.04	171.1
K102010	PEAD	1	200	200	7.7	4.64	267.64
K102510	PEAD	1	250	250	9.6	7.3	418.37
K103110	PEAD	1	315	315	12.1	11.6	664.17
K105600	PEAD	1	56	56	3	0.51	19.6

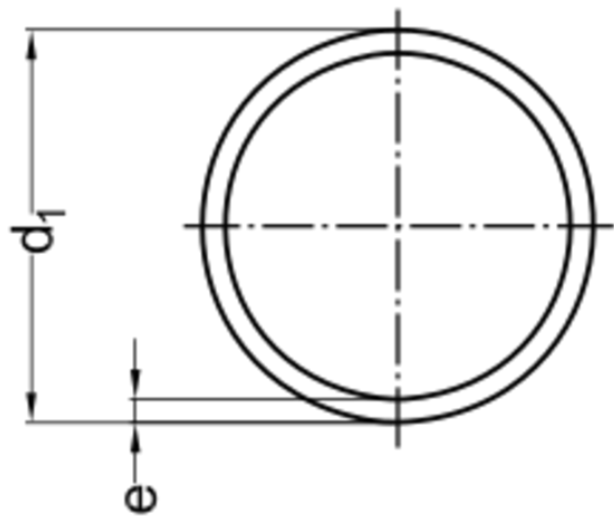