


Derivación 90º registrable con tapa roscada

Derivación 90º registrable con tapa roscada
Derivación 90º registrable puede utilizarse en tuberías horizontales y verticales.

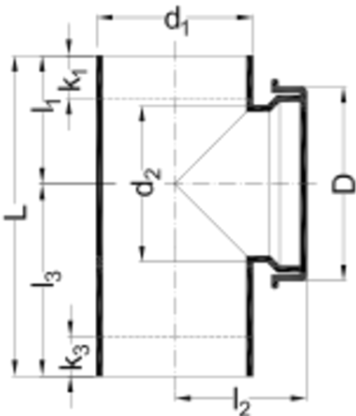

Referencia	Características	Unidades por caja	Medida	l1	hp (mm)	l3	D1 D2	k1	k3		
K230400	-	1	40/40	55	80	75	40/40	25	45		
K230500	-	1	50/50	60	72	90	50/50	25	55	72	150
K230600	-	1	63/63	70	100	105	63/63	30	60	87	175
K230700	-	1	75/75	70	100	105	75/75	25	55	91	175
K230900	-	1	90/90	80	100	120	90/90	25	70	118	200
K231100	-	1	110/110	90	115	135	110/110	20	65	140	225
K231200	-	1	125/110	100	123	150	125/110	20	80	140	250
K231600	-	1	160/110	140	140	210	160/110	60	135	140	350
K232000	-	1	200/110	180	160	180	200/110	90	90	140	360
K232500	-	1	250/110	220	185	220	250/110	110	110	140	440
K233100	-	1	315/110	280	220	280	315/110	170	170	140	560
K235600	-	1	56/56	70	100	105	56/56	30	65	83	175